


## 1544BAS

### GLOBALCOM® 5400 Series 4 Channel Back-up Amplifier Switch

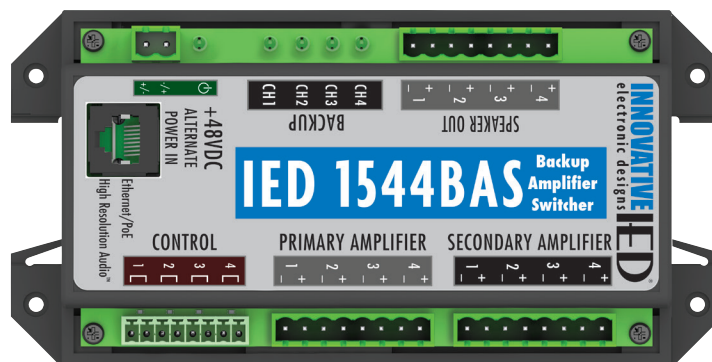

### Features

- 4 channels of backup amplifier switching
- Multiple units gang to a single backup amplifier when used with the GLOBALCOM® system
- Control and configure using a web browser and GLOBALCOM® system management center and 5400 Designer control software
- Fully integrated with the IED GLOBALCOM® vACS and 5400 Designer
- IEEE 802.3af Power over Ethernet (PoE)
- Removable connectors for easy installation
- Rugged DIN-rail or panel / wall mount enclosure

### General Description

The 1544BAS is a backup amplifier switching module capable of switching up to four (4) loudspeaker loads from a primary power amplifier to a secondary amplifier when a failure is detected. In stand-alone mode, logic outputs from the primary amplifier are used to trigger the switching of each individual channel to the backup amplifier. In network control mode, switching is determined by the IED GLOBALCOM® system supervision sub-system. In network control mode, multiple 1544BAS units can be used to switch multiple primary amplifiers to a single backup amplifier unit. When used in this manner, all switching logic is accomplished through network commands and the logic inputs are not used. The 1544BAS is powered using standard Power Over Ethernet (PoE) and draws a maximum power of 4 watts. If PoE equipment is not used or the unit is used in stand-alone mode, an input is provided for an optional 48VDC alternate power supply. A green LED indicator illuminates to show that the unit is powered on. Each channel has a yellow LED indicator that illuminates when the channel is switched to the backup amplifier input. When not in network control mode, each channel can be switched to the backup using a contact closure on the corresponding logic input. The 1544BAS is provided in an enclosure that either mounts to a DIN rail or is screwed down on a panel or wall to allow for convenient installation close to the amplifiers in the equipment rack.

### Specifications

#### Electrical:

#### Relay Contacts (4)

<b>Contact Form</b>	DPDT (Form C)
<b>Max Voltage</b>	250VAC
<b>Max Current</b>	8 Amps
<b>Max Power Amplifier Rating (each channel)</b>	500 Watts

#### Power Requirements:

<b>Input Voltage</b>	48VDC (PoE Compliant with IEEE 802.3af)
<b>Power</b>	4 Watts Max
<b>Optional 48VDC Alternate Power Input Voltage</b>	40 - 50VDC

#### Indicators:

<b>Power LED</b>	1 (Green)
<b>Backup Status LED</b>	4 (Yellow)

#### Mechanical:

<b>Height</b>	7.01" (17.81 cm)
<b>Width</b>	3.50" (8.90 cm)
<b>Depth</b>	2.00" (5.08 cm)
<b>Weight</b>	9.6 oz (272 g)

#### Environmental:

<b>Operating Temperature Range</b>	-22°F – +149°F (-30°C – +65°C)
------------------------------------	--------------------------------

#### Connections:

<b>Loudspeaker Output (1)</b>	8-pin Phoenix, 5.08 mm Spacing
<b>Primary / Secondary Inputs (2)</b>	8-pin Phoenix, 5.08 mm Spacing
<b>Control Logic Input (1)</b>	8-pin Phoenix, 3.81 mm Spacing
<b>Ethernet / PoE (1)</b>	RJ-45 (Cat 5e or Higher, 100BaseTX Cable)
<b>48VDC Alternate Power Input (1)</b>	2-pin Phoenix, 5.08 mm Spacing