



iWall 104C

HDMI 4K60 1x4 Video Wall Controller

User manual V1.0



www.infobitav.com info@infobitav.com

Thank you for purchasing this product

For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

Surge protection device recommended

This product contains sensitive electrical components that may be damaged by electrical spikes, surges, electric shock, lighting strikes, etc. Use of surge protection systems is highly recommended in order to protect and extend the life of your equipment.

Table of Contents

| | |
|---|----|
| 1. Introduction | 1 |
| 2. Features | 1 |
| 3. Package Contents..... | 2 |
| 4. Specifications..... | 2 |
| 5. Operation Controls and Functions. | 4 |
| 6. IR Remote. | 6 |
| 7. IR Cable Pin Assignment. | 7 |
| 8. Video Wall. | 7 |
| 9. RS-232 Control Command. | 8 |
| 10. Application Example..... | 12 |

1. Introduction

The 18Gbps 1x4 Video Wall Controller is designed to realize truly capturing, AD converting, routing, and distributing all-format signal to the video wall (LCD displays), while maintaining a true digital signal transmission. It features HDMI and USB-C input with resolution up to 4K@60 4:4:4, and 4 HDMI outputs. It supports multiple video wall modes to be set for video output. Furthermore, optical audio and L/R analog audio de-embedding output are also supported.

It can be controlled via front panel buttons, IR remote and RS-232 commands.

2. Features

- ☆ HDMI 2.0, HDCP 2.2 and DP1.2a compliant
- ☆ Support HDMI and USB-C inputs, and the resolution is upto 4K@60Hz 4:4:4, not working simultaneously
- ☆ Support optical and L/R analog audio de-embedding outputs
- ☆ Support 8x video wall modes: 1x1, 2x1, 3x1, 4x1, 1x2, 1x3, 1x4, 2x2
- ☆ Support image 180° rotation, convenient for ceiling installation
- ☆ Support bezel adjustment
- ☆ Advanced EDID management
- ☆ Control via front panel buttons, IR remote and RS-232 commands
- ☆ Plug and play, no driver or software required

3. Package Contents

- ① 1 × 18Gbps 1x4 Video Wall Controller
- ② 1 × 12V/1A Locking Power Supply
- ③ 1 × Power Adapter
- ④ 1 × IR Remote
- ⑤ 1 × 5V IR Receiver Cable (1.5m)
- ⑥ 1 × 3pin-3.81mm Phoenix Connector (male)
- ⑦ 4 × Machine Screw (KM3*4)
- ⑧ 2 × Mounting Ear
- ⑨ 1 × User Manual

4. Specifications


| Technical | |
|------------------|---|
| HDMI Compliance | HDMI 2.0b |
| HDCP Compliance | HDCP 2.2 |
| Video Bandwidth | 18Gbps |
| Video Resolution | Input: up to 4K@60Hz 4:4:4 Output: 720P60Hz, 1080P60Hz, 4K30Hz, 1024x768P60Hz |
| Color Space | RGB, YCbCr_4:4:4, YCbCr_4:2:2, YCbCr_4:2:0 |
| Color Depth | 8/10/12 bit |
| IR Level | 5Vp-p |
| IR Frequency | 38KHz |
| Audio Formats | HDMI IN/OUT: LPCM 2.0/5.1/7.1, Dolby Digital/Plus/EX, DTS, DTS-EX, DTS-96/24 L/R OUT: PCM 2.0 SPDIF(OPTICAL): Dolby Digital/plus, DTS 5.1, PCM 2.0 |
| Audio Latency | No Latency |
| Video Latency | No Latency |

4. Specifications

| | | | |
|---|--|-------------|----------------|
| ESD Protection | Human body model — ±8kV (Air-gap discharge) & ±4kV (Contact discharge) | | |
| Connection | | | |
| Input ports | 1 × HDMI INPUT [Type A, 19-pin female] 1 × USB-C INPUT [Type C, 24-pin female] | | |
| Output ports | 4 × HDMI OUTPUT [Type A, 19-pin female] 1 × OPTICAL AUDIO OUT [S/PDIF] 1 × L/R AUDIO OUT [RCA] | | |
| Control ports | 1 × RS-232 [3pin-3.81mm phoenix connector] 1 × IR EXT [3.5mm, Stereo Mini-jack] | | |
| Mechanical | | | |
| Housing | Metal Enclosure | | |
| Color | Black | | |
| Dimensions | 220mm [W] × 100mm [D] × 30mm [H] | | |
| Weight | 590g | | |
| Power Supply | Input: AC 100-240V 50/60Hz, Output: DC 12V/1A (US/EU standard, CE/FCC/UL certified) | | |
| Power Consumption | 5.5W (Max) | | |
| Operating Temperature | 32 - 104°F / 0 - 40°C | | |
| Storage Temperature | -4 - 140°F / -20 - 60°C | | |
| Relative Humidity | 20 - 90% RH (no-condensing) | | |
| Video Resolution | 4K60 | 4K24 | 1080P60 |
| HDMI Cable Length (HDMI IN / OUT) | 8m/26ft | 10m/32ft | 15m/49ft |
| The use of "Premium High Speed HDMI" cable is highly recommended. | | | |


5. Operation Controls and Functions

5.1 Front Panel




| NO. | Name | Function Description |
|-----|--------------|---|
| 1 | Power button | In shutdown/standby status, press this button to power on; in power-on status, press this button for 2~3 seconds to enter standby status. |
| 2 | Power LED | The LED will light in green when the product is working normally, and red when the product is on standby. |
| 3 | HDMI LED | The LED will light in green when HDMI input is selected. |
| 4 | USB-C LED | The LED will light in green when USB-C input is selected. |
| 5 | AUTO LED | The LED will light in green when auto switching is enabled. |
| 6 | IR window | IR signal receiving window. |
| 7 | HDMI button | Press this button to select the HDMI input channel. |
| 8 | USB-C button | Press this button to select the USB-C input channel. |
| 9 | MODE button | Press this button to switch the 8 splicing modes circularly. |
| 10 | RES button | Press this button to switch the resolutions of the four HDMI outputs circularly. |

5.2 Rear Panel

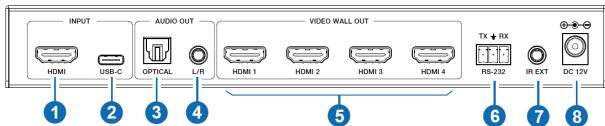

| NO. | Name | Function Description |
|-----|--------------------------|--|
| 1 | HDMI INPUT | HDMI signal input port, connected to an HDMI source device. |
| 2 | USB-C INPUT | USB-C signal input port, connected to a USB-C source device. |
| 3 | OPTICAL AUDIO OUT | Optical audio output port, connected to an audio output device such as an audio amplifier. |
| 4 | L/R AUDIO OUT | Analog audio output port, connected to an audio output device such as a speaker. |
| 5 | VIDEO WALL OUT (HDMI1~4) | HDMI signal output port, connected to TVs. |
| 6 | RS-232 | 3-pin phoenix connector, connected to a PC or control system for serial port upgrade or RS-232 command control. |
| 7 | IR EXT | IR signal receiving port, connected with 38KHz IR Receiver cable. If the IR signal receiving window of the unit is blocked or the unit is installed in a closed area out of infrared line of sight, the IR receiver cable can be inserted to the "IR EXT" port to receive the IR remote signal. |
| 8 | DC 12V | Connect to 12V/1A power adapter. |

6.IR Remote

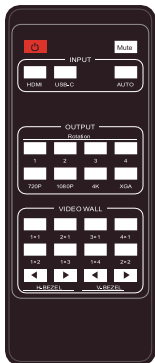

Power on or Standby:

Power on the device or set it to standby mode.

Mute:

Turn off/on the audio output, including HDMI, Optical and L/R audio.

HDMI:

Press to select HDMI input channel.

USB-C:

Press to select USB-C input channel.

AUTO:

Press to disable or enable the input auto switching.

Rotation 1/2/3/4:

Press to switch rotation angle between 0° and 180° for the corresponding output channel.

Resolution 720P/1080P/4K/XGA:

Press to switch the resolution for the 4 output channels at the same time.

VIDEO WALL MODE:

There are 8 splicing modes: 1x1, 2x1, 3x1, 4x1, 1x2, 1x3, 1x4, 2x2. Press to select the display mode.

H/V-BEZEL ◀ ▶ :

Press to adjust the bezels of the splicing images.


7. IR Cable Pin Assignment

IR Receiver pin's definition is as below:



8. Video Wall

Video wall supports 8 splicing modes as below:

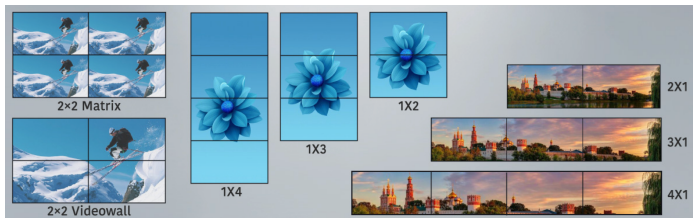


User can set display modes via front panel buttons, IR remote, and RS-232 commands.

Note:

In the video wall mode (except mode 1x1 (2x2 matrix mode)), only the screens which are selected to perform video wall splicing will display images and their bezels can be adjusted.

9. RS-232 Control Command

The product also supports RS-232 command control. Connect the RS-232 port of the product to a PC with a 3-pin phoenix connector cable and an RS-232 to USB cable. The connection method is as follows.

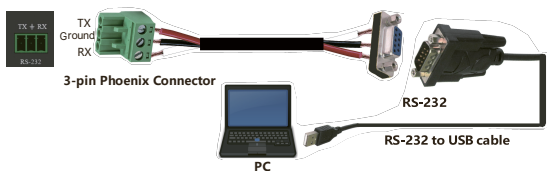

Then, open a Serial Command tool on PC to send ASCII command to control the device.

The ASCII command list is shown as below.

| ASCII Command | | | | |
|--|---------------------------|-----------|--|-----------------|
| Serial port protocol. Baud rate: 115200 (Default), Data bits: 8, Stop bits:1, Check bit: 0 | | | | |
| x - Parameter 1, y - Parameter 2, ! - Delimiter | | | | |
| Command Code | Function Description | Example | Feedback | Default Setting |
| System Setting | | | | |
| help! | List all commands | help! | | |
| r status! | Get device current status | r status! | get the unit all status: power, video wall mode, output resolution... | |
| r type! | Get device model | r type! | 1x4 video wall controller | |


| Command Code | Function Description | Example | Feedback | Default Setting |
|-----------------------|---|---------------------------|---|--|
| System Setting | | | | |
| r fw version! | Get firmware version | r fw version! | mcu fw version : x.xx.xx | |
| s power z! | Power on/off the device, z=0~1 (z=0 power off, z=1 power on) | s power 1! | power on system initializing... initialization finished! mcu fw version x.xx.xx | |
| r power! | Get current power state | r power! | power on /power off | |
| s reboot! | Reboot the device | s reboot! | reboot... 1x4 video wall controller system initializing... initialization finished! mcu fw version : x.xx.xx | |
| s reset! | Reset to factory defaults | 1x4 video wall controller | reset to factory defaults 1x4 video wall controller system initializing... initialization finished! mcu fw version : x.xx.xx | 1. HDMI in; 2. EDID: 4K60 4:4:4 2ch; 3. audio mute off; 4. 1x1 video wall mode; 5. 1080p output; 6. All HDMI out no rotation; 7. H-Bezel=0, V-Bezel=0; |

| Command Code | Function Description | Example | Feedback | Default Setting |
|-----------------------|--|-----------------------|-------------------------------------|-----------------------------|
| Input Setting | | | | |
| s input x edid z! | Set input x edid mode (x=0~2, z=1~6) x=0. all input x=1. input1 x=2. input2 z=1. 4k60, 2.0ch z=2. 4k60, 5.1ch z=3. 4k30, 2.0ch z=4. 4k30, 5.1ch z=5. 1080p, 2.0ch z=6. 1080p, 5.1ch | s input 1 edid 1! | input 1 edid: 4k60, 2.0ch | 4k60,2.0ch |
| r input x edid! | Get input x edid mode (x=0~2) x=0. all input x=1. HDMI in x=2. USB-C in | r input 1 edid! | hdmi in edid: 4k60, 2.0ch | |
| s output in source x! | Route input source to output (x=1~2) x=1. HDMI in x=2. USB-C in | s output in source 1! | output->hdmi in | output->HDMI in |
| r output in source! | Get output y selected input source | r output in source! | output->hdmi in | |
| Output Setting | | | | |
| s tw mode x! | Set tv wall display mode (x=1~8) x=1. 1x1 mode x=2. 2x1 mode x=3. 3x1 mode x=4. 4x1 mode x=5. 1x2 mode x=6. 1x3 mode x=7. 1x4 mode x=8. 2x2 mode | s tw mode 1! | tv wall mode: 1x1 | tv wall mode: 1x1 |
| r tw mode! | Get tv wall display mode | r tw mode! | tv wall mode: 2x2 | |
| s tw h bezel +! | Set tv wall horizontal bezel | s tw h bezel +! | tv wall horizontal bezel: (bezel+1) | tv wall horizontal bezel: 0 |

| Command Code | Function Description | Example | Feedback | Default Setting |
|-----------------------|--|----------------------|--|--|
| Output Setting | | | | |
| s tw h bezel -! | Set tv wall horizontal bezel | s tw h bezel -! | tv wall horizontal bezel: (bezel-1) | tv wall horizontal bezel: 0 |
| s tw h bezel x! | Set tv wall horizontal bezel (x=0~10) | s tw h bezel 0! | tv wall horizontal bezel: 0 | tv wall horizontal bezel: 0 |
| r tw h bezel! | Get tv wall row bezel | r tw h bezel! | tv wall horizontal bezel: 0 | |
| s tw v bezel +! | Set tv wall vertical bezel | s tw v bezel +! | tv wall vertical bezel: (bezel+1) | tv wall vertical bezel: 0 |
| s tw v bezel -! | Set tv wall vertical bezel | s tw v bezel -! | tv wall vertical bezel: (bezel-1) | tv wall vertical bezel: 0 |
| s tw v bezel x! | Set tv wall vertical bezel (x=0~10) | s tw v bezel 0! | tv wall vertical bezel: 0 | tv wall vertical bezel: 0 |
| r tw v bezel! | Get tv wall vertical bezel | r tw v bezel! | tv wall vertical bezel: 0 | |
| s tw res x! | Set tv wall resolution (x=1~4) 1. 1280x720p60, 2. 1920x1080p60, 3. 3840x2160p30, 4. 1024x768@60 (XGA) | s tw res 2! | tv wall resolution: 1920x1080p60 | tv wall resolution: 1920x1080p60 |
| r tw res! | Get tv wall resolution | r tw res! | tv wall resolution: 1920x1080p60 | tv wall resolution: 1920x1080p60 |
| s output y rotate x! | Set output y mirror (y=1~4, x=0,1) y=1. output 1 y=2. output 2 y=3. output 3 y=4. output 4 x=0. 0° rotation x=1. 180° rotation | s output 1 rotate 0! | output1: 0° rotation | output1: 0° rotation output2: 0° rotation output3: 0° rotation output4: 0° rotation |
| r output y rotation! | Get output y mirror status (y=0~4) y=0. output all y=1. output 1 y=2. output 2 y=3. output 3 y=4. output 4 | r output 0 rotation! | output1: 0° rotation output2: 0° rotation output3: 0° rotation output4: 0° rotation | |

| Command Code | Function Description | Example | Feedback | Default Setting |
|------------------------|---|------------------------|------------------------|-----------------|
| Output Setting | | | | |
| s output audio mute x! | Set output audio mute on/off (x=0~1) 0. mute off 1. mute on | s output audio mute 0! | output audio mute: off | off |
| r output audio mute! | Get output audio mute on/off | r output audio mute! | output audio mute: off | |

10. Application Example

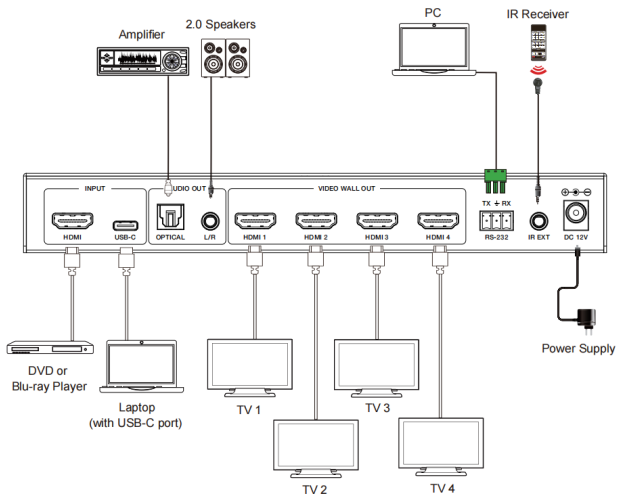

HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE

The terms HDMI and HDMI High-Definition Multimedia interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.