




PA TR40

TR40 - Line transformer 100v-40/20/10/5/2,5 W.

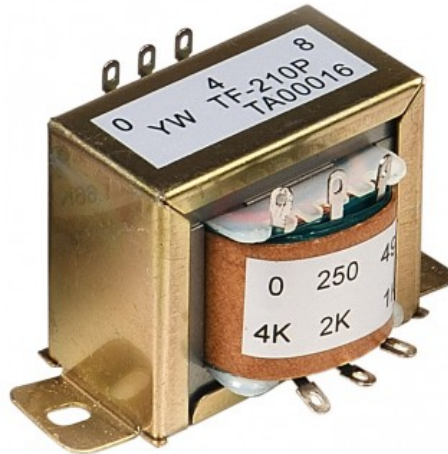

Overview

TR40 - Line transformer 100V - 40/20/10/5/2,5 W. Primary impedance 250-490-1000-2000-4000 ohm. Secondary impedance 8-4 ohm.

Technical Specifications

Type: Audio line transformer

- Inputs: 100V line
- Notes: Power: 40/20/10/5/2.5W
- Primary impedance: 250/490/1000/2000/4000 ohm
- Secondary impedance: 8/4 ohm

Technical specifications and appearances are subject to change without notice and accuracy is not guaranteed. All trademarks are the property of their respective owners. PROEL accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph or statement contained herein. Colors and specifications may vary from actual product. PROEL products are sold through authorized fullfillers and resellers only. This manual is copyrighter. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording of any kind, for any purpose, without the express written permission of PROEL - Via alla Ruenia 37/43 - CAP 64027 - Sant'Omero (TE) ITALY.

For service, support, or more information contact:

Proel S.p.A.

Via alla Ruenia 37/43

CAP 64027 - Sant'Omero (TE) ITALY

